

Save money with the all-in-one POTS replacement solution.



Educational institutions can migrate from copper-based phone lines to an intelligent solution that runs on a hassle-free wireless network.

Ooma has partnered with Carahsoft Technology Corp., the trusted government IT solutions provider. This partnership enables government agencies and educational institutions to easily purchase Ooma AirDial through Carahsoft's contracts including OMNIA, NASP, ITES, SEWP and more.

Ooma AirDial allows you to retain your critical systems and is ideal for:



Security Alarm Panels



Building Entry Phones



Fire Alarm Panels



Essential Phone Lines



Elevator Phones



Fax Machines



Public Safety Phones



Backup Phone Service



All-inclusive solution

- Solve all POTS challenges with one provider - hardware, data, and phone service with no monthly rate "surprises".

Tremendous value

- Save money on monthly phone bills.

Compliance

- Built with the applicable guidelines of UL, NFPA 72, California Fire Marshal, and ASME A17.1B in mind.

Simple migration

- Provides a quick, easy migration and organizations can keep using existing systems.

DIY or turnkey installation

- Deploy yourself; or receive end-to-end project management from assessment to installation and support.

Flexible deployment options

- Configure to provide LTE failover for mission critical VoIP lines.

Remotely managed

- Get automatic software updates and system monitoring.

Increase visibility

- Manage all locations and devices using intuitive web portal. Get SMS and email alerts should outages occur or when batteries are low.

Failover Protection

- MultiPath technology sends all voice traffic over both the LTE and wired Ethernet links simultaneously to avoid service interruptions; backup battery maintains service for 16 hours which can be extended to more than 24 hours using an optional external battery accessory.




CP Group, a vertically integrated commercial real estate and management firm, is the largest office landlord in Florida and among the top 25 in the United States. Their portfolio includes the Boca Raton Innovation Campus, the largest single office facility in Florida at 1.7 million square feet.

The Challenge

For the many elevators spread across the Boca Raton Innovation Campus, POTS lines were becoming more expensive and less reliable. Also, construction of additional facilities was about to knock out a wiring room where many POTS lines terminated.

The Solution

CP Group is using 14 Ooma AirDial units to provide connections for 17 elevators. CP Group is benefiting by experiencing a 50% cost reduction by switching to AirDial from traditional POTS service.




“I’ve received calls from other property managers and I’ve highly recommended Ooma AirDial for their facilities.”

Greg Yuskanich, Project Manager, CP Group

The Ultimate in High Availability

Ooma’s MultiPath transport technology routes all voice traffic over both the LTE and wired ethernet networks simultaneously to avoid service disruptions.

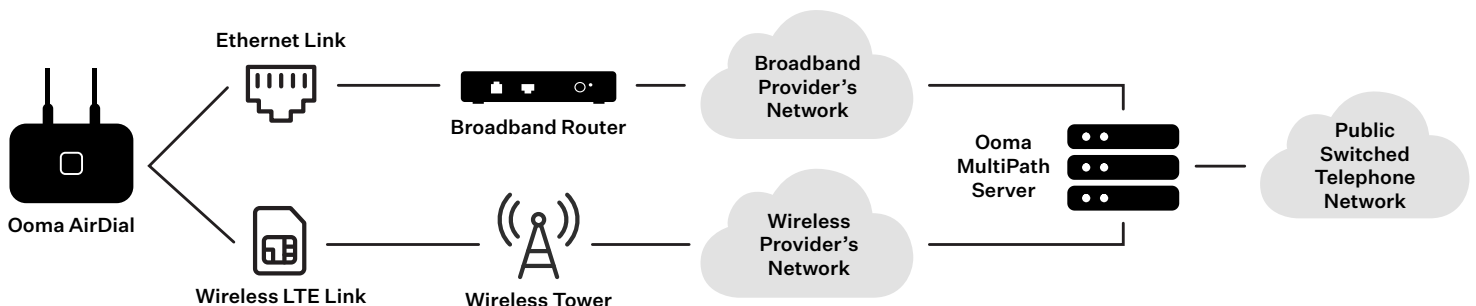

Ooma AirDial – Remote Device Management and Notification Tool

With Ooma AirDial's Remote Device Management web portal you have complete visibility into all systems in one location. Instantly see service status, LTE signal strength, battery life and more across all Ooma AirDial devices and locations.

Device List View

Name	MyID	Service Status	WAN Status	LTE	Battery State	Battery Level	FXS Port 1	FXS Port 2	FXS Port 3	FXS Port 4	Carrier	Adapter Firmware Version	Base Station	Time in Service
South Tower	549514	In-service	LTE	Full	100%	(872) 873-3032	(872) 873-3031				T-Mobile	105559585	105559585	About an hour ...
North Tower	54C748	In-service	LTE	Full	100%	(872) 888-1204	(872) 888-1030				T-Mobile	105559585	105559585	About 21 minut...
Center Building	549D84	In-service	LTE	Full	100%	(872) 873-3029	(872) 873-3026	(872) 873-3025	(872) 873-3024		T-Mobile	105559585	105559585	About an hour ...

Generate event notifications.

A notification can be received via SMS text message or email. You choose which type of notification is generated for each event, and you can add multiple recipients for each notification type.

Notification events include:

- Device In-Service
- Device Out-of-Service
- Battery Activated
- Battery Low
- Device on AC Power

Role-based access capabilities empower account owners to give other users permissions such as Administrator, Editor, or User, without sharing login credentials.

Device Notification Settings

Center Building
myx_001861549D84

Choose The Events To Be Notified Of

Device In-Service:	<input type="checkbox"/> Email	<input checked="" type="checkbox"/> SMS
Battery Activated:	<input checked="" type="checkbox"/> Email	<input type="checkbox"/> SMS
Device Out Of Service:	<input checked="" type="checkbox"/> Email	<input checked="" type="checkbox"/> SMS
Battery Low:	<input checked="" type="checkbox"/> Email	<input checked="" type="checkbox"/> SMS
Device On AC Power:	<input type="checkbox"/> Email	<input checked="" type="checkbox"/> SMS

Enter The Email ID(s) To Notify

Enter Email ID:
steve@loophotelgroup.com

cd-alerts@ooma.com

Enter The Mobile Number(s) To Notify

Enter Mobile Number:
(312) 555-1212

Ooma AirDial Specifications

Processor	Dual-core ARM Cortex A9 CPU
Modem	Quectel EG95-NAXD; Cat-4 LTE
LTE Band Support	B2/B4/B5/B12/B13/B25/B26
LTE Data Rates	Up to 150 Mbps down and 50 Mbps up
Antennas	Two wideband 5G/4G terminal mount antennas, hinged 90° termination with SMA(M) connector
SIMs	Dual micro-SIM support
Telephony	Four RJ-11 analog FXS ports; 55Vrms Low Power Ringing
MultiPath	Routes all voice traffic over both the LTE and wired Ethernet links simultaneously to avoid service interruptions
Managed Facilities Voice Network (MFVN)	MFVN compliant network, when needed, ensures traffic never crosses the public internet.
Ethernet	One RJ-45 10/100/1000 Ethernet WAN port; One RJ-45 10/100/1000 Ethernet LAN port
Power	AC-DC Adapter w/ MicroFit+ connector; Input 100-240 VAC 50-60Hz, Output: 12VDC/3A 36W
Battery Backup	Replaceable battery pack 3S3P Li-ion battery: 10.95V, 3A; Capacity 85.4 Wh (7.8 Ah) provides 16 hours of standby time which can be extended to > 24 hours with an optional external battery accessory
Display	320x240 LCD display
Switches	Master On/Off; Factory reset (recessed)
Dimensions	W 30cm x H 6cm x D 20cm when sitting horizontally
Line and Battery Status	Monitoring notifications via SMS and email alerts
Administration	Web-based management portal
Operating Temperature	0 - 40° C
Warranty	1 Year limited warranty

Industry Recognition



060524-Education-KJ

Save money with Ooma AirDial. Call 866-839-5810 today for more information.